

# PANEL ONLY

Our Panel Only option allows you to use our ducting and access panels with your own on-site timber framing, sanitaryware and brassware.

Our panels are available with either lift off or push fit clips determined by panel position. For added security and easy access choose hinged lockable access panels.

<b>01</b>	<b>Flashgaps</b>	Supplied oversize for on-site adjustment
<b>02</b>	<b>Panels</b>	Suitable for use with your chosen sanitaryware and brassware
<b>03</b>	<b>Fittings</b>	Push fit, lift off or hinged panel fittings
<b>04</b>	<b>Frame</b>	Supplied by others

## Specification Options

### Performance

- \_\_\_\_\_ MFC
- \_\_\_\_\_ HPL
- \_\_\_\_\_ SGL
- \_\_\_\_\_ Real Wood Veneer
- \_\_\_\_\_ ColourCoat™

### Colours

- \_\_\_\_\_ Full colour range

### We supply

- \_\_\_\_\_ Access panels
- \_\_\_\_\_ Flashgap panels
- \_\_\_\_\_ Panel fittings


### You supply

- \_\_\_\_\_ On-site framing
- \_\_\_\_\_ Sanitaryware
- \_\_\_\_\_ Brassware
- \_\_\_\_\_ Skirting

## Helpful Links

[View our full product range online](#)   [Create your specification with our online tool](#)

[Try out colours on our Design Tool](#)   [Read our case studies and helpful blogs](#)

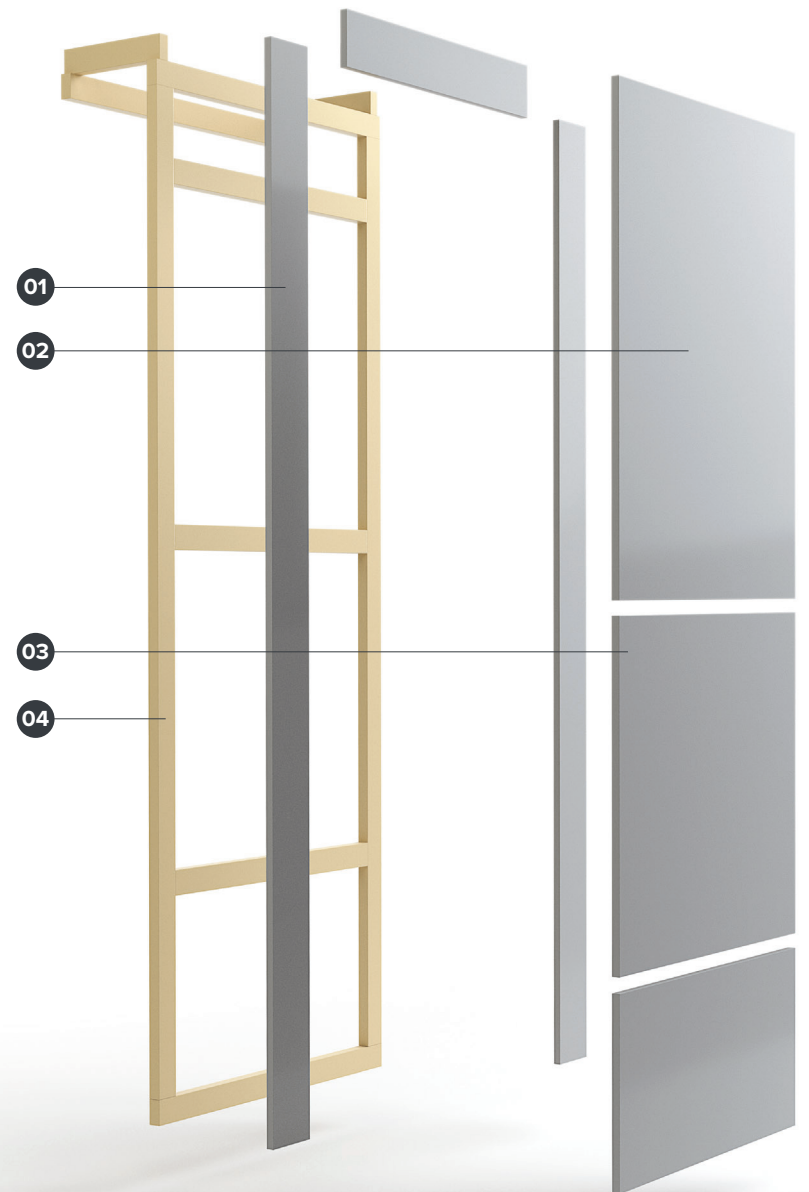

# PERFORMANCE

## Melamine Faced Chipboard – MFC

Light to medium use – Dry

High performance Melamine Faced Chipboard 650kg/m<sup>3</sup> density, moisture resistant, suitable for dry environments with light to medium use. Panels supplied square edged with matching 1mm PVC lipping.

## High Pressure Laminate – HPL

Medium use – Dry

High Pressure Laminate bonded onto 680kg/m<sup>3</sup> density, moisture resistant chipboard, suitable for dry environments with more intense use. Panels supplied square edged with matching 1mm PVC lipping or postformed vertical edges.

## Solid Grade Laminate – SGL

Heavy use – Wet or dry

High density Solid Grade Laminate, 1400kg/m<sup>3</sup> impervious to water, suitable for the most demanding environments where strength and/or water resistance are needed. Polished radiused black edges as standard.

## Real Wood Veneer

Light to medium use – Dry

MDF faced both sides with Real Wood Veneer, suitable for dry environments with light to medium use. Panels supplied square edged with 3mm Real Wood Veneer lipping.

## ColourCoat™

Light to medium use – Dry

High performance MDF sprayed with 2 coats of liquid primer and finished with 2 coats of ColourCoat™ pigmented lacquer.

## Solid Surface

Heavy use – Wet or dry

Solid surface is manufactured from an advanced composition of minerals and acrylic polymer that delivers a seamless finish to vanity tops and is exceptionally hardwearing.



MFC – Melamine Faced Chipboard




HPL – High Pressure Laminate



SGL – Solid Grade Laminate



Real Wood Veneer



Colourcoat™



Solid Surface

- All lipping is applied with PUR adhesive
- Real Wood Veneer, ColourCoat™, MFC and HPL are not suitable for use in wet environments

See our separate Colour Selector for our full range of panel colour options.